



NOTES

1. ALL BARS SHALL BE PERPENDICULAR TO THE FACE AND BE LEVEL.
2. SAWED CONTROL JOINTS SHALL BE CAULKED WITH APPROPRIATELY COLORED SEALANT.
3. CONSTRUCTION JOINTS SHALL OCCUR ON LANE LINES.
- ▲ 4. EDGE RESTRAINT (HEADER) SHALL BE CONSTRUCTED BETWEEN RED COLOR STAMPED CONCRETE AND CHARCOAL COLOR STAMPED CONCRETE.

* "33-P (PUG)" - 303-01, TYPE A, GRADING D ("33-P"), TENNESSEE D.O.T. SPECIFICATIONS.

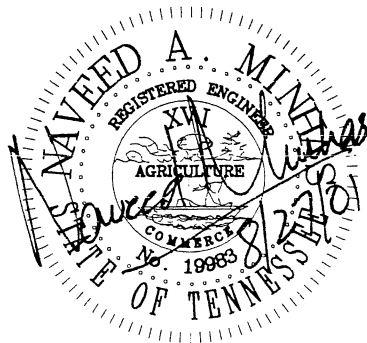

			CITY OF CHATTANOOGA AND HAMILTON COUNTY	
			<i>PAVER INTERSECTION DETAIL</i>	
1	REVISIONS AS MARKED OR CLOUDED	8/24/01	DATE OF ORIGINAL ISSUE DECEMBER 10, 1999	
0	INITIAL ISSUE	12/10/99		
NO.	REVISION	DATE	STANDARD NUMBER : <i>SD-504.01</i>	